

Coat, recommended fabric: brushed wool, fleece, stretch fabrics: 1.40 br.

Skirt, recommended fabric: linen, cotton, fine cord in combination with voile rand: 1.40 br.

CONSUMPTION, mtr:


	92	104	116	128	140	152
Coat	1.10	1.15	1.25	1.35	1.40	1.50
Skirt, fabric	0.70	0.70	0.75	0.75	0.80	0.80
Skirt, voile	0.25	0.25	0.25	0.25	0.25	0.25

REQUIREMENTS:

Coat: 1,5 meter cord  
2 cord stoppers  
4 cord ends  
yarn  
2 meter ribbon, 2,5cm width

Skirt: yarn  
zipper, 18cm. Nylon  
interfacing  
button, 15 mm.  
0,5 meter elastic, 3cm width

[www.abacadabra.com](http://www.abacadabra.com)

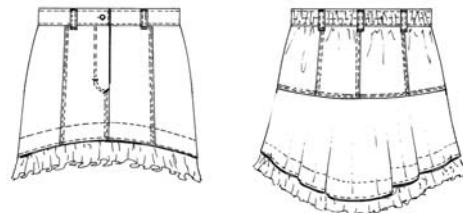

Download your own language from our site!

AVAILABLE

ENGLISH

DEUTSCH

[www.abacadabra.com](http://www.abacadabra.com)

INSTRUCTIONS, NEXT PAGE:

Place the facing of the front panel to the front panel right sides together; the collar is caught in between. Join the neckline; cut seam allowances back and fold facing inside. Topstitch the neckline; topstitch simultaneously the seam allowances of the back-neckline to the back panel.


Proceed the hem edge of the sleeve and the outer edge of the jacket at this way. Cut seam allowances back to 0cm and edge stitch the edges all around.

Cut the ribbon in 2 equal pieces. Define the height of the ribbon at the front panel and join the ribbon starting at the seam of the front panel and ending 4 cm in front of the edge of the center front.

String the cord through the drawstring of the collar. String at each end a cord stopper and a cord end and knot ends.


All that's left is to sew your ABACADABRA label at the jacket and you've completed the job!

## Take the child's measurements!

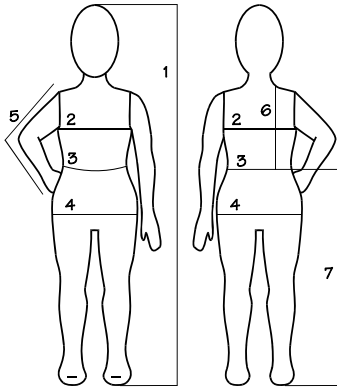

1.height	92	104	116	128	140	152
2.chest	54	58	60	64	71	79
3.waist	52	54	56	58	61	65
4.hip	55	61	65	69	75	83
5.sleeve length	31	36	41	46	51	55
6.back waist l.	23	25	27	30	32	36
7.side length	53	62	71	80	89	96

## Explanation of symbols

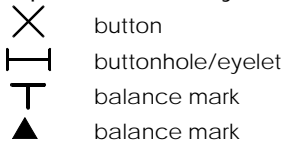

## Pattern preparation


- Compare body measurements with the ABACADABRA measurement chart, choose the size corresponding with the chest and hip of the child
- Draw length measurements differences on to the pattern.
- Wash the fabric before cutting
- All patterns are without seams and hems, all contour lines are stitching lines, seam allowances 1 cm all around.
- Note the grain line marked on the pattern! Run the grain line parallel with the selvage.
- Lock stitch: strengthening stitch, (fine zigzag stitch).
- After cutting out the fabric panels, transfer all seam lines and markings onto the fabric. Transfer fold and stitching lines to the right sides of the fabric with basting stitches.

## MODEL 80: SKIRT

All skirt seams must be double topstitched.

Place the side part of the front and the center front part of the front right sides together and join, finish seam allowances and topstitch at the center front part. Join the 3 back parts so complete back part is formed, finish seam allowances and topstitch.

## Fly zipper:

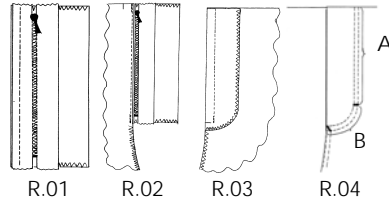


Fold the overlap facing left sides together and join along the bottom edge and open side. Finish the edges. Stitch the zipper at the overlap (dr. R.01). If the zipper is too long, let it stick out at the upper edge. This part can later be cut off or worked into the waistband. Finish the centre front seams separately. Press seam allowances of the right front part (only 1cm), to the wrong side of the fabric.

Sew front part along the zipper at the overlap (dr. R.02). Cut the other centre front panel seam allowances back to 1cm. Neaten the round edge of the front facing overlap. Sew the front facing overlap right sides together at the front panel (dr. R.03). 'Fold' overlap and front panel open, press seam allowances to the overlap side and top-stitch at the edge. Pin both front panels, right sides together and baste the centre front seam. Sew the centre front seam from the bottom edge exactly to the last stitch of the overlap facing. Turn over the skirt, the part with the zipper on top. Join the left zipper tape to the overlap facing, attention: do not catch the other overlap (the one from dr. R.01) in the seam. Fold the front panels open; all that is left is the top-stitch. Right side of the front panels on top, the overlap still fold away, sew stitch A (dr.R.04), fold the overlap back, the way it has to be, sew stitch B (dr.R.04). Lock stitch the fly, see drawing R.04.

Place the front to the back panel right sides together and join side seams. Finish seam allowances and topstitch at the back panel.

Waistband: the waistband needs



interfacing at the front of the waistband. Join the waistband to the waistline edge right side on left and press seam allowances into the band. Measure the child's waist and calculate the size of the elastic. (Complete waist minus the part that will not have any elastic). Fold the waistband along the centre break right sides together and sew ends (see drawing). Cut back seam allowances, trim corners diagonally. Turn the waistband, press edges. Fold underneath seam allowances along the cut waistband edge, place elastic between the waistband, then join elastic and waistband. Baste the waistband edge overlapping the joining seam, press and top-stitch closely along the edge, stretch elastic while you top-stitch the edge and once again sew 2 stitches through the elastic.

Place the hem facings right sides together and join the side seams. Press seam allowances apart.

Voile: cut from voile 2 flounces of 10 cm height, use the complete fabric width. Join the side seams so a circle is formed and finish the side seams. Finish one edge of the 'circle' with a fine lock stitch or narrow seam. Gather the other edge of the flounce. The length after gathering must become the same length as the upper edge of skirts hem edge facing. Gather on the machine at this way: sew on 0,5cm and 1.5cm from the cut edge with large stitches. Tighten bobbin threads to the respective hem width and knot ends. Even out the gather.

Join the gathered edge to the upper edge of the facing right sides together. Finish seam allowances. Place the facing to the hem edge of the skirt right sides together (fold back the voile flounce). Join the facing to the hem edge of the skirt, cut seam allowances back and turn the facing to the inside. Edge stitch the hem edge. Baste the upper edge of the facing to the skirt and topstitch at the finished edge of the facing.

Work a buttonhole into the overlap of the waistband to suit button size and sew the button to the underlap.

Belt loops: finish both long edges of the loop. Turn under both edges 1cm wide along the entire length, press and top-stitch edges. Finished loops: 1cm. Cut the strip into 5 pieces, turn ends under, pin to the waistband and topstitch ends.

## MODEL 80: COAT

\*Process not fraying fabrics (like fleece etc.) in this way; join panels **left** side together, press seam allowances apart and decorate with a wide zigzag stitch in the middle; Process fraying fabrics as you are accustomed to doing.

Join the seam in the front and back panel as explained above so one complete back panel and 2 front panels are formed.

Join the shoulder seams.

At the side seam of the front and back panels are 3 darts, cut in the darts as shown at the pattern sheet. Proceed the darts at the same way as the seams.

Place the upper sleeve and lower sleeve to each other and join.

Baste the sleeve into the armhole and join. Join the side seam and sleeve seam in one operation.

Collar: fold the drawstring to the right side of the fabric as marked at the pattern sheet. Place the collar to the neckline left side to right and join; use the 1cm seam allowances at the normal way.